

# On the Impact of Re-Evaluation in 5G NR V2X Mode 2

Alejandro Molina-Galan <sup>✉</sup>, Associate Member, IEEE, Luca Lusvarghi <sup>✉</sup>, Associate Member, IEEE, Baldomero Coll-Perales <sup>✉</sup>, Member, IEEE, Javier Gozalvez <sup>✉</sup>, Senior Member, IEEE, and Maria Luisa Merani <sup>✉</sup>, Senior Member, IEEE

**Abstract**—5G NR V2X has been designed to support advanced connected and automated driving V2X services. These services are characterized by variable traffic patterns that can generate packet collisions in decentralized systems where vehicles autonomously select their radio resources like 5G NR V2X mode 2. 5G NR V2X introduces a re-evaluation mechanism at the MAC layer to detect and avoid possible packet collisions before a vehicle transmits in selected resources. Most of the studies conducted to date on 5G NR V2X do not consider the re-evaluation mechanism despite being a mandatory MAC feature. This article advances the state of the art with an in-depth analysis and evaluation of the operation and performance of re-evaluation in 5G NR V2X mode 2 under different traffic patterns and mode 2 configurations. The study shows that re-evaluation is effective in avoiding collisions with periodic traffic but its effectiveness decreases with aperiodic traffic and of variable size. The study also shows that re-evaluation is effective in avoiding collisions generated by the retransmission of packets. However, its overall impact on the performance of 5G NR V2X mode 2 is small, while it can have a relevant implementation cost due to the frequent re-evaluation checks and resource reselections. This raises questions on the current design of the re-evaluation mechanism that is a mandatory feature in 5G NR V2X mode 2.

**Index Terms**—5G NR V2X, re-evaluation, CAV, C-V2X, cellular V2X, connected automated vehicles, mode 2, NR V2X, collisions, aperiodic, periodic, distributed scheduling, resource allocation.

## I. INTRODUCTION

THE 5G New Radio (NR) Vehicle-to-Everything (V2X) standard published in 3GPP Release 16 is the first 5G NR standard that enables sidelink (SL) or direct Vehicle-to-Vehicle (V2V) communications using the NR PC5 interface [1]. 5G

Manuscript received 27 March 2023; revised 7 July 2023 and 21 August 2023; accepted 11 September 2023. Date of publication 22 September 2023; date of current version 13 February 2024. The work of Alejandro Molina-Galan, Baldomero Coll-Perales, and Javier Gozalvez was supported in part by MCIN/AEI/10.13039/501100011033 under Grants IJC2018-036862-I and PID2020-115576RB-I00, in part by the Ministry of Universities under Grant FPU18/00691, in part by Generalitat Valenciana under Grants CIGE/2021/096 and CIGE/2022/17, and in part by UMH's Vicerrectorado de Investigación grants. The review of this article was coordinated by Dr. Vuk Marojevic. (Corresponding author: Luca Lusvarghi.)

Alejandro Molina-Galan, Baldomero Coll-Perales, and Javier Gozalvez are with the UWICORE Laboratory, Universidad Miguel Hernandez de Elche, 03202 Elche, Spain (e-mail: alejandro.molinag@umh.es; bcoll@umh.es; j.gozalvez@umh.es).

Luca Lusvarghi and Maria Luisa Merani are with the Department of Engineering “Enzo Ferrari”, University of Modena and Reggio Emilia, 41125 Modena, Italy, and also with the Consorzio Nazionale Interuniversitario per le Telecomunicazioni, 00133 Rome, Italy (e-mail: luca.lusvarghi5@unimore.it; marialuisa.merani@unimore.it).

Digital Object Identifier 10.1109/TVT.2023.3318235

NR V2X (or NR V2X) is designed to complement and not replace LTE V2X. LTE V2X was designed to support basic safety applications using broadcast messages. NR V2X also supports unicast and groupcast transmissions, and includes new features and functionalities to support advanced V2X services with stringent requirements such as cooperative perception and driving, among others. To this aim, NR V2X SL introduces two new operating modes: mode 1 and mode 2. In mode 1, the cellular infrastructure manages and selects the communication resources for each SL communication, while in mode 2, vehicles autonomously select and manage radio resources without the support of the cellular infrastructure.

NR V2X mode 2 is critical to support connected and automated mobility since safety services should not always depend on the availability of cellular coverage. According to 3GPP [2], these advanced safety services will generate V2X messages of variable size and generation times. Variable traffic patterns were shown to significantly impact the operation and performance of LTE V2X mode 4 [3], which is the counterpart of NR V2X mode 2. This was due to certain Medium Access Control (MAC) inefficiencies when vehicles generate aperiodic messages of variable size that result in packet collisions and require additional solutions [4], [5]. NR V2X mode 2 introduces a re-evaluation mechanism at the MAC sublayer to detect and prevent possible collisions caused by aperiodic messages of variable size. The re-evaluation mechanism is a mandatory MAC feature that is executed before a vehicle transmits on selected resources to detect any possible packet collisions [6]. Several studies have recently analyzed the performance of NR V2X mode 2. In [7], authors evaluate different configurations of NR V2X mode 2 parameters under periodic traffic of fixed size including, for example, the impact of retransmissions. The studies reported in [8], [9] and [10] evaluate NR V2X mode 2 considering also aperiodic traffic of fixed size. In [8], the authors analyze the performance of NR V2X mode 2 under different configurations. The work reported in [9] compares the performance of the two scheduling schemes of NR V2X mode 2 under different message generation patterns, and [10] compares the performance of NR V2X mode 2 with the performance of LTE V2X mode 4. Despite their relevant contributions, the studies reported in [7], [8], [9], [10] did not implement the re-evaluation mechanism despite being a mandatory MAC feature in 3GPP standards. In addition, these studies only consider periodic or aperiodic traffic of fixed size. However, the 3GPP evaluation methodology guidelines for

NR V2X reported in [2] recommend traffic generation models for advanced V2X services that also include traffic of variable size in line with the message patterns characteristic of Day 2 or Day 3 V2X services such as cooperative perception [11] or maneuver coordination [12]. In this context, this article extends the current state of the art by analyzing the operation and performance of NR V2X mode 2 considering periodic or aperiodic traffic of fixed or variable size. In particular, this study provides an in-depth analysis of the operation of the re-evaluation mechanism introduced in NR V2X mode 2 to clearly understand the conditions under which re-evaluation can be effective in avoiding packet collisions. We should note that the first study that evaluated the system-level performance of NR V2X mode 2 with re-evaluation was reported by the authors in [13]. This study analyzed the performance of NR V2X mode 2 under different data traffic patterns when vehicles use the Semi-Persistent Scheduling (SPS) scheme and there are no retransmissions. The study showed that the performance of NR V2X mode 2 degrades when vehicles generate aperiodic traffic of variable size compared to when the traffic is periodic and of fixed size. This degradation is due to an increment of packet collisions despite the fact that re-evaluation has been specifically designed and introduced to detect and avoid packet collisions. The study in [13] provides a first system level evaluation of NR V2X mode 2, but does not explain why re-evaluation is not effective in avoiding packet collisions under certain scenarios. Understanding why this is the case is critical to optimize NR V2X mode 2. In addition, it is necessary to analyze and understand if the reported observations hold for other scenarios, for example, using a different scheduling scheme as well as when utilizing retransmissions. In this context, this article advances the state of the art with an in-depth analysis and evaluation of the impact of the re-evaluation mechanism on the operation and performance of NR V2X mode 2. To the authors' knowledge, this is the first study that analyzes when (NR V2X mode 2 configuration and scenario) and why re-evaluation is effective or not to detect and avoid packet collisions. In particular, this study analyzes the effectiveness of re-evaluation to detect and avoid packet collisions when NR V2X mode 2 operates with the SPS or Dynamic Scheduling (DS) schemes. With SPS, vehicles select and reserve radio resources for the transmission of several consecutive data packets as well as for their possible retransmissions. On the other hand, vehicles using DS need to select new radio resources for the transmission of each data packet, and can only reserve resources for the retransmission of these packets. The analysis is done considering that vehicles transmit periodic or aperiodic packets of fixed or variable size following 3GPP guidelines in [2]. The study also evaluates the impact of retransmissions on the effectiveness of re-evaluation. Our study shows that re-evaluation is effective in avoiding packet collisions when packets are periodic and of fixed size and are transmitted with SPS. However, these collisions are rare, and hence the impact of re-evaluation for this traffic is small. On the other hand, the effectiveness of re-evaluation to avoid packet collisions decreases with aperiodic traffic of variable size whether using SPS or DS. The capacity of the re-evaluation mechanism to detect and avoid packet collisions improves when retransmissions

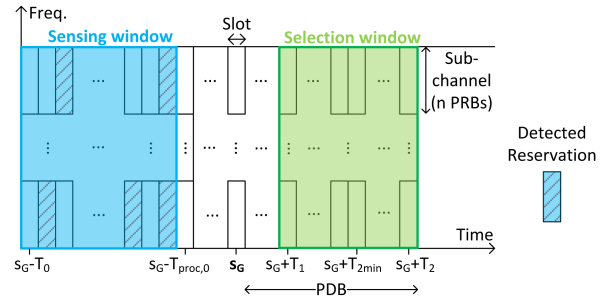


Fig. 1. NR V2X channelization and illustration of resource allocation in mode 2 (when  $T_2 = PDB$ ).

are considered under both SPS and DS. However, the impact of re-evaluation on the performance of NR V2X mode 2 is small with SPS and DS since the benefit of retransmissions prevails over the gains obtained with the packet collisions avoided with re-evaluation. For the sake of brevity, we refer to NR V2X mode 2 as mode 2 in the rest of the article.

The rest of this article is organized as follows. Section II provides an overview of mode 2, including the re-evaluation mechanism and a discussion on the impact of packet variability on the MAC. Section III presents an in-depth analysis of the re-evaluation mechanism that identifies and helps understand when re-evaluation can be effective or not in detecting and avoiding packet collisions. Section IV presents the evaluation environment and the metrics utilized. Section V evaluates the impact of re-evaluation on SPS without retransmissions, and Section VI extends the analysis to the scenario where retransmissions are considered. The impact of re-evaluation on DS is analyzed in Section VII, and Section VIII summarizes the main outcomes of this study.

## II. RESOURCE ALLOCATION IN 5G NR V2X MODE 2

Mode 2 radio resources are organized in a grid made of slots in the time domain and Resource Blocks (RBs) in the frequency domain. The slot duration is  $2^{-\mu}$  ms and an RB consists of 12 consecutive subcarriers with a subcarrier spacing (SCS) of  $2^\mu \times 15$  kHz, where  $\mu$  is the OFDM numerology,  $\mu = 0, 1, 2,$  or  $3$ . This results in slots of  $\{1, 0.5, 0.25, 0.125\}$  ms and RBs of  $\{180, 360, 720, 1440\}$  kHz for SCSs of  $\{15, 30, 60, 120\}$  kHz, respectively. Vehicles in a particular region communicate over a common set of radio resources, termed resource pool. A resource pool uses a single numerology and its RBs are referred to as physical resource blocks (PRBs). PRBs within the same slot are grouped into sub-channels that represent the smallest unit for SL data transmission or reception (see Slot and Sub-channel ( $n$  PRBs) in Fig. 1<sup>1</sup>). The number of PRBs that form a sub-channel (i.e., the sub-channel size) can be configured but it is fixed for a given resource pool.

In mode 2, data packets are transmitted in Transport Blocks (TBs) that are carried on the Physical Sidelink Shared Channel (PSSCH). Note that the terms TB and packet are interchangeable

<sup>1</sup>The remaining variables and processes represented in this figure are explained below in Section II-A since they are related to resource allocation.

in this article. A TB can occupy more than one sub-channel depending on the size of the packet, the sub-channel size, and the utilized Modulation and Coding Scheme (MCS). TBs can be transmitted using QPSK, 16-QAM, 64-QAM or 256-QAM modulations, and are encoded using Low-Density Parity-Check (LDPC) coding. Each TB is associated with Sidelink Control Information (SCI). A TB and its associated SCI are transmitted in the same slot. The SCI in NR V2X is transmitted in two stages. The 1st-stage SCI is carried on the Physical Sidelink Control Channel (PSCCH), while the 2nd-stage SCI is multiplexed together with the TB in the PSSCH. The 1st-stage SCI indicates the resources used by the PSSCH and carries information required for decoding the TB. If retransmissions are employed, the 1st-stage SCI indicates the resource reservation for up to two retransmissions of the TB. The 1st-stage SCI also informs about the *Resource Reservation Interval (RRI)* if the vehicle reserves resources semi-persistently for the PSSCH, as detailed in [Subsection II-A](#). The 2nd-stage SCI carries information used for decoding the PSSCH as well as for supporting retransmissions and mechanisms to report channel state information.

#### A. Resource Allocation

Vehicles using mode 2 autonomously select their resources (one or several sub-channels) to transmit the TBs. The process to select new resources is referred to as *reselection* by the 3GPP standards. Mode 2 can operate using a Dynamic Scheduling (DS) or Semi-Persistent Scheduling (SPS) scheme. Both schemes follow similar procedures to select new resources [14]. However, the DS scheme selects new resources for each TB and can only reserve resources for the retransmissions of that TB. The SPS scheme selects and reserves resources for the transmission of *Reselection Counter* consecutive TBs, and can also reserve resources for the retransmissions of the TBs. It is important to highlight the differences between selected and reserved resources. A selected resource is a resource that a vehicle selects to transmit a TB using the two-step resource allocation algorithm that is described in the remainder of this Section. A reserved resource is a selected resource that the vehicle reserves for a future transmission by notifying neighboring vehicles using the 1st-stage SCI. The *RRI* determines the time period between the resources reserved for the transmission of consecutive TBs in SPS. The *RRI* can be  $\{0, [1:99], 100, 200, 300, 400, 500, 600, 700, 800, 900, 1000\}$  ms. A vehicle can be configured with a list of up to 16 different *RRI*s, but it only selects one *RRI* from the list when it selects new resources. The selected *RRI* also determines the value of the *Reselection Counter*. According to 3GPP standards [6], the vehicle randomly sets the *Reselection Counter* within the interval  $[5, 15]$  when  $RRI \geq 100$  ms, and within the interval  $[5 * C, 15 * C]$ , where  $C = 100 / \max(20, RRI)$ , when  $RRI < 100$  ms.

New resources (for both the DS and SPS schemes) are selected in the so-called selection window portrayed in Fig. 1 [14]. The selection window is defined within the range of slots  $[s_G + T_1, s_G + T_2]$ , where  $s_G$  is the slot at which a new TB is generated.  $T_1$  is the processing time required to identify candidate resources within the selection window to transmit the TB and its associated

SCI, and  $T_1 \leq T_{proc,1}$ , where  $T_{proc,1}$  is 3, 2.5, 2.25 or 2.125 ms for an SCS of 15, 30, 60 or 120 kHz, respectively.  $T_2$  can be set by the vehicle within  $T_{2min} \leq T_2 \leq PDB$ . The Packet Delay Budget (PDB) is established by the V2X application generating the TB, and defines the latency deadline by which the TB must be transmitted<sup>2</sup>. According to 3GPP standards [14],  $T_{2min}$  can be set by the vehicle to  $\{1, 5, 10, 20\}$  ms depending on the priority of the TB. Vehicles sense transmissions performed by other vehicles within the so-called sensing window (Fig. 1) while they are not transmitting. This allows them to identify which candidate resources are available within the selection window. The sensing window range is  $[s_G - T_0, s_G - T_{proc,0}]$ . According to 3GPP standards [14],  $T_0$  can be equal to 1100 ms or 100 ms, and  $T_{proc,0}$  is equal to 1 ms for a SCS of 15 kHz and 0.50 ms for the remaining values of SCS.

DS and SPS schemes follow a two-step algorithm to select new resources [6], [14]. During step 1, the vehicle is in charge of excluding resources from the selection window. First, the vehicle excludes resources that it could not sense when it was transmitting due to its half-duplex operation. In particular, if a vehicle could not sense resources at slot  $s_i$  within the sensing window, it excludes all resources within the selection window located at an integer number of *RRI* (in slots) ahead of  $s_i$ <sup>3</sup>. The vehicle also decodes the 1st-stage SCI received from other vehicles in the sensing window. For each transmission received in the sensing window, the vehicle also measures the Reference Signal Received Power (RSRP) [14]. A resource in the selection window is considered occupied if the vehicle detected in the 1st-stage SCIs decoded in the sensing window that another vehicle was reserving it and the measured RSRP was higher than an RSRP threshold. If this is the case, these candidate resources within the selection window are excluded. Once the execution of step 1 is completed, the vehicle (with DS or SPS) checks whether the percentage of candidate resources that have not been excluded in the selection window is equal to or higher than a threshold  $X\%$ ;  $X$  can be 20, 35, or 50. If not, step 1 is repeated using an RSRP threshold increased by 3 dB.

In step 2 (with DS or SPS), the vehicle randomly selects the resources for the transmission of a TB from the available candidate resources within the selection window. A vehicle can select  $N$  candidate resources ( $N \leq 32$ ) within the same selection window for the initial transmission of a TB and its  $N-1$  retransmissions. NR V2X supports blind and Hybrid Automatic Repeat Request (HARQ) feedback-based retransmissions. Blind retransmissions are considered in this work when we refer to retransmissions. Each vehicle can select the value of  $N$  but it cannot be higher than the number of available candidate resources after step 1. The vehicle considers the limitations of the 1st-stage SCI for the selection and reservation of the  $N$  candidate resources. In particular, a 1st-stage SCI can only notify about a maximum number of  $N_{SCI}$  resources (equal to 2 or 3). The selection of candidate resources also takes into account that a 1st-stage SCI

<sup>2</sup>The constraint  $T_{2min} \leq T_2 \leq PDB$  prevents the vehicle from violating the PDB of the TB that must be transmitted.

<sup>3</sup>The resource exclusions due to half-duplex operation have to consider all possible *RRI* values of the *RRI* list.

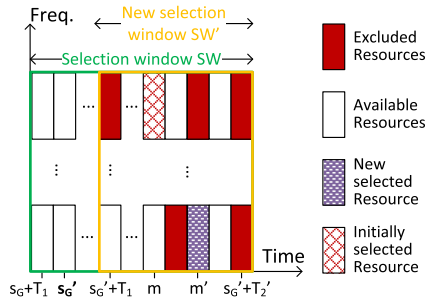


Fig. 2. Operation of re-evaluation under NR V2X mode 2.

can only notify about resource reservations for retransmissions located within a window  $W$  of 32 slots, with the first slot of  $W$  being the one where the 1st-stage SCI is transmitted. When retransmissions are separated by more than 32 slots from the slot where the 1st-stage SCI is transmitted, they are not reserved with the 1st-stage SCI [6].

With SPS, when the vehicle performs the transmission of a TB, it also reserves resources for the transmission of the next TB using the *RRI* included in the 1st-stage SCI. The *RRI* also reserves the resources for the retransmissions of the next TB when the 1st-stage SCI informs about the retransmissions of a TB. The vehicle reserves resources every *RRI* ms for *Reselection Counter* transmissions. The *Reselection Counter* is decremented by one every time the vehicle transmits a TB and its  $N-1$  retransmissions. When *Reselection Counter* depletes, the vehicle decides with probability  $(1-P)$  whether it has to select new resources for the transmission of the following TBs;  $P$  can be set between 0 and 0.8. If not, the vehicle keeps using the same resources for the next *Reselection Counter* TBs and the same *RRI* included in the 1st-stage SCI. If the vehicle has to select new resources, it sets to zero the value of the *RRI* in the 1st-stage SCI of the TB that depleted the *Reselection Counter*. This is done to notify other vehicles that it is not reserving the same resources for the transmission of the next TB. Note that a vehicle using SPS may need to select new resources for the transmission of a new TB even if *Reselection Counter* is not depleted. This happens when the size of a new TB does not fit in the resources previously selected, or when the previously selected resources do not meet the latency requirement of the new TB as detailed in Section II-C.

### B. Re-Evaluation Mechanism

Mode 2 introduces the re-evaluation mechanism to detect and avoid possible collisions in the transmission of a TB. To this aim, vehicles that have selected new resources check whether these resources are still available (i.e., they have not been reserved by another vehicle) before transmitting a TB. If they are not available, they will select new resources to avoid the detected collision. We should note that the re-evaluation mechanism can only operate over selected resources and not reserved ones according to the standard [6]. Re-evaluation applies to both DS and SPS.

The operation of re-evaluation is illustrated in Fig. 2. Let us suppose that the vehicle selects new resources located at slot  $m$ . It

must then execute again step 1 of the resource allocation process at slot  $s_G' = m - T_3$  to check whether the selected resources are still available or they are excluded<sup>4</sup>, where  $T_3$  is equal<sup>5</sup> to  $T_{proc,1}$ . The execution of step 1 at slot  $s_G'$  is referred to as a *re-evaluation check* by the 3GPP standards. The execution of the re-evaluation check results in the definition of a new selection window  $SW'$  within the range of slots  $[s_G'+T_1, s_G'+T_2']$ .  $T_2'$  is defined in the range  $T_{2min} \leq T_2' \leq PDB - (s_G' - s_G)$  so that the upper limit of  $SW'$  does not violate the PDB of the TB to be transmitted. Step 1 is executed over the candidate resources in  $SW'$ . If step 1 reveals that the originally selected resource at slot  $m$  is now excluded, then the re-evaluation check has resulted in a *re-evaluation detection* following the 3GPP terminology [14]. The re-evaluation detection triggers the execution of step 2 of the resource allocation algorithm to select new resources among the currently available resources in  $SW'$ . As a result, the initially selected resources are replaced by new resources located at, e.g., slot  $m'$  in Fig. 2. The execution of step 2 as part of the re-evaluation mechanism is referred to as *resource replacement*.

A vehicle could have selected  $N$  resources for the initial transmission of the TB and its retransmissions. If this is the case, when the vehicle performs the re-evaluation check at slot  $s_G'$ , it will assess whether the  $N$  selected resources are still available. If the re-evaluation detection happens over a subset  $M$  of the  $N$  selected resources, then the vehicle executes a resource replacement to select  $M$  new resources among the available candidate resources in  $SW'$ . It is important to note that when the vehicle performs the initial transmission of the TB, it might be announcing the reservation of the  $N_{SCI} - 1$  following retransmissions of the TB. As soon as the resources for these retransmissions are reserved, they are no more eligible for a re-evaluation check since re-evaluation only operates over selected and not reserved resources.

It is important to distinguish two different cases where a vehicle can execute a re-evaluation check. The first case happens when the vehicle selects new resources in the selection window. This re-evaluation check is mandatory following 3GPP standards [6] and occurs for both the DS and SPS schemes. The second case only occurs when a vehicle is configured with SPS, and it does not utilize a reservation announced in the 1st-stage SCI. If it later generates a new TB, the transmission of the TB could take place in the resources located *RRI* ms after the unutilized reservation. Since the reservation of these resources has not been announced, the standard defines that it is ‘up to UE implementation’ whether the vehicle also executes the re-evaluation check before transmitting the TB [6]. This study considers that vehicles execute the re-evaluation in both cases.

### C. Impact of Packet Variability on SPS

SPS reserves the same resources for *Reselection Counter* consecutive TBs with a time gap between reservations of *RRI* ms. SPS is particularly suited for the transmission of periodic traffic

<sup>4</sup>The standard defines that the execution of step 1 at  $m - T_3$  is mandatory. The vehicle could also execute step 1 before  $m - T_3$  [6].

<sup>5</sup> $T_3$  is equivalent to 3, 5, 9 or 17 slots for a SCS of 15, 30, 60 or 120 kHz, respectively.

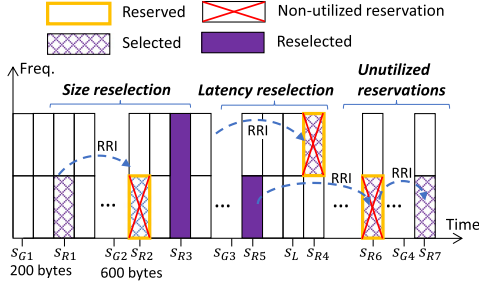


Fig. 3. Impact of packet variability on SPS under NR V2X mode 2.

with fixed size. In this case, SPS only reselects resources when the *Reselection Counter* is depleted (depending on  $1-P$ ). We define this event as *counter reselection*. We consider SPS to be stable if all reservations are utilized to transmit TBs and reselections happen only after the reselection counter depletes. Like in LTE-V2X mode 4 [4], additional reselections may be triggered if the TB size or the inter-arrival time between TBs change. These additional reselections can make SPS more unstable and prone to collisions since neighboring vehicles will not be aware of the newly selected resources until the next TB is transmitted and the transmitting vehicle announces the reservation for the following TBs. Therefore, the probability of packet collisions increases with the number of reselections. It is worth noting that packet variability has no impact on the operation of the DS scheme since vehicles using DS reselect resources for every new TB.

1) *Size Reselections*: SPS triggers a resource reselection when the size of a new TB does not fit in the previously reserved resources. This event is termed *size reselection*. Fig. 3 shows a vehicle  $V_A$  that generates a TB (e.g., 200-byte long) at slot  $s_{G1}$ , and selects one sub-channel for its transmission at slot  $s_{R1}$ . When transmitting the TB at  $s_{R1}$ ,  $V_A$  also announces in the associated SCI that the same sub-channel is reserved at slot  $s_{R2} = s_{R1} + RRI$ . Let us now suppose that  $V_A$  generates at slot  $s_{G2}$  a new TB (e.g., 600-byte long) that does not fit the current resource reservation at  $s_{R2}$ .  $V_A$  is forced to drop the reserved resources at  $s_{R2}$ , reselect new resources able to accommodate the size of the new TB (e.g., two sub-channels in Fig. 3), and transmit the TB in the reselected resources at slot  $s_{R3}$ .

2) *Latency Reselections*: A vehicle might also need to select new resources if its current reservation is not able to cope with the latency requirements (i.e., the PDB) of a new TB. We refer to this event as *latency reselection*. Latency reselections occur when a vehicle generates aperiodic traffic and the adopted *RRI* value is larger than the latency deadline or PDB of a TB. The latency reselection is also illustrated in Fig. 3. In this example,  $V_A$  has reserved one sub-channel at slot  $s_{R4}$ .  $V_A$  generates its next TB at slot  $s_{G3}$ , and its latency deadline is set at slot  $s_L$ . The current reservation at  $s_{R4}$  does not respect the latency requirements of the TB since  $s_{R4} > s_L$ .  $V_A$  is then forced to drop the reserved resources at  $s_{R4}$ , and select new resources by the latency deadline (e.g., at  $s_{R5}$  in Fig. 3).

3) *Unutilized Reservations*: The stability of SPS might be also compromised when reserved resources are not utilized by

a vehicle; we term this event as *unutilized reservations* [4]. This can happen because there is no TB ready to be transmitted at the slot where the resources are reserved. Fig. 3 shows that unutilized reservations occur when the inter-arrival time between the generated TBs is larger than the adopted *RRI* value. In Fig. 3,  $V_A$  has reserved one sub-channel at slot  $s_{R6} = s_{R5} + RRI$ . However, the next TB is generated at slot  $s_{G4}$  with  $s_{G4} > s_{R6}$ , and  $V_A$  leaves the sub-channel at  $s_{R6}$  unutilized. We should note that  $V_A$  cannot exploit its transmission opportunity at  $s_{R6}$  to announce the reservation at slot  $s_{R7}$  in the SCI. The transmission of  $V_A$  at slot  $s_{R7}$  is then prone to packet collisions since it has not been reserved.

### III. ANALYSIS OF THE RE-EVALUATION MECHANISM

The re-evaluation mechanism is an important novelty introduced in mode 2 to increase the flexibility in the management of resources and guarantee a more effective scheduling of transmissions. This Section analyzes the operation of the re-evaluation mechanism and discusses the impact that the most relevant mode 2 parameters have on the effectiveness of the re-evaluation check, the re-evaluation detection, and the resource replacement phase.

#### A. Re-Evaluation Check

Vehicles use the re-evaluation check to assess whether selected resources are still available or not right before transmitting the TB. The objective is to detect and avoid potential collisions. 3GPP standards establish that re-evaluation checks are only possible on selected (and not reserved) resources. Accordingly, re-evaluation checks are performed before the transmission of all TBs when using the DS scheme since this strategy selects new resources for each TB. When the SPS scheme is considered, re-evaluation checks affect a smaller number of TBs since SPS only selects new resources as a result of a counter reselection, by design. Once new resources are selected, the remaining TBs are transmitted on reserved resources. If we assume, for example,  $P = 0$  and  $RRI \geq 100$  ms, only 1 TB out of 10 triggers a counter reselection (the average reselection counter value is 10 in this case), and hence only 10% of the generated TBs are transmitted on selected resources that are eligible for a re-evaluation check. However, we should note that latency reselections, size reselections, and unutilized reservations (see Section II-C) increase the fraction of TBs that are transmitted on selected resources in SPS, and thus increases the number of re-evaluation checks.

Regardless of the scheduling scheme, the fraction of TBs that triggers a re-evaluation check is also affected by the value of  $T_2$ , i.e., by the width of the selection window (see Fig. 1). Let us assume that a vehicle  $V_A$  generates a new TB at slot  $s_{G1}$  and performs a resource reselection. The selection window is defined by the range of slots  $[s_{G1} + T_1, s_{G1} + T_2]$  where  $T_1 \leq T_{proc,1}$ . In principle, any selected resource included within the selection window shall be eligible for a re-evaluation check. However, a re-evaluation check can be performed only if the vehicle has sufficient processing capabilities to run the entire re-evaluation mechanism before transmitting the TB. If the re-evaluation

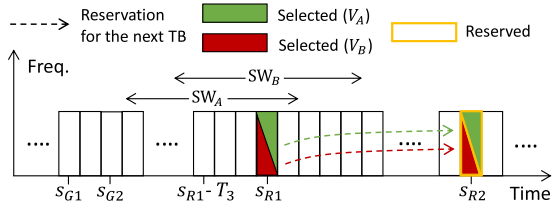


Fig. 4. Persistent collisions not detected by re-evaluation when using SPS.

check cannot be performed due to insufficient processing capabilities, then the vehicle uses the same selected resource for transmitting the TB. According to the 3GPP standard [6], a re-evaluation check can only be performed if the selected resource is included in the  $(s_{G1} + T_3, s_{G1} + T_2]$  interval, where  $T_3$  is strictly equal to  $T_{proc,1}$ . Therefore, the candidate resources included from slot  $s_{G1} + T_1$  to slot  $s_{G1} + T_3$  are not eligible for a re-evaluation check. Depending on  $T_2$ , the number of resources included in  $[s_{G1} + T_1, s_{G1} + T_3]$  can be a significant fraction of the total number of resources within the selection window. For example, let us assume that  $T_2 = PDB = RRI$ , and that  $\mu = 0$ ,  $T_1 = 1$  slot and  $T_3 = 5$  slots. In this case, the percentage of selection window resources that are not eligible for a re-evaluation check is equal to  $\{5, 25, 50\}$  % when  $RRI = \{100, 20, 10\}$  ms.

### B. Re-Evaluation Detection

A re-evaluation detection is triggered after a re-evaluation check when the initially selected resources are no longer available. Typically, a re-evaluation detection occurs when the initially selected resources have also been reserved by a neighboring vehicle, and a potential collision is detected. This section sheds light on the circumstances under which a potential collision does and does not trigger a re-evaluation detection. To do so, we separately analyze the re-evaluation detection phase when each TB is transmitted once ( $N = 1$ ) and when it is transmitted twice ( $N = 2$ , with one blind retransmission) without loss of generality. This section concludes with an insightful discussion about the effectiveness of the re-evaluation detection phase.

1) *Single Transmission Per TB ( $N = 1$ ):* We first consider the case where a collision occurs on selected resources. This type of collision cannot be detected by a re-evaluation detection since vehicles do not announce their selection before transmitting on selected resources. This is illustrated in Fig. 4 where  $V_A$  and  $V_B$  select new resources to transmit their TBs generated at slots  $s_{G1}$  and  $s_{G2}$ , respectively. If their selection windows ( $SW_A$  and  $SW_B$ ) overlap, the two vehicles may select the same resources at slot  $s_{R1}$ , as illustrated in Fig. 4.  $V_A$  performs a re-evaluation check at slot  $s_{R1} - T_3$ , but step 1 does not exclude the resources at slot  $s_{R1}$  since  $V_B$  has not yet announced its reservation. This is the case because also  $V_B$  has performed a reselection after generating the TB at slot  $s_{G2}$  and its transmission at slot  $s_{R1}$  occurs on selected resources. The re-evaluation mechanism is not capable to detect and avoid the collision at  $s_{R1}$ . The same situation occurs when  $V_B$  executes its re-evaluation check. If  $V_A$  and  $V_B$  use the SPS strategy, they will reserve the same resources for transmitting their next TB, at slot  $s_{R2}$ , and they

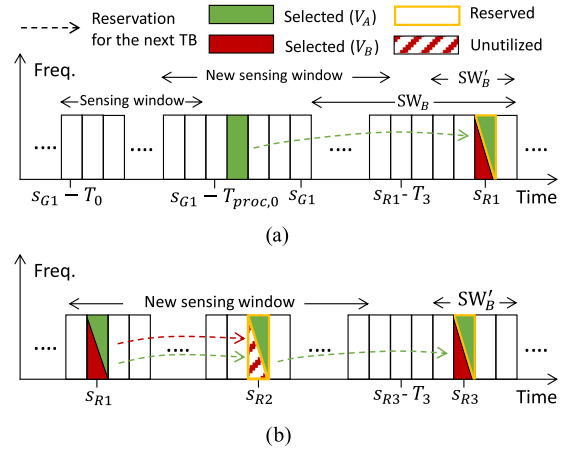


Fig. 5. Re-evaluation detection when vehicles use the same  $RRI$ . (a) Periodic TBs of fixed size. (b) Unutilized reservations.

will persistently collide until a (counter, latency, or size) reselection occurs if they employ the same  $RRI$  (like in Fig. 4). The persistent collision cannot be avoided by the re-evaluation mechanism because it is only executed over selected and not reserved resources.

As demonstrated in the remainder of this section, only collisions between selected and reserved resources can be identified by the re-evaluation detection.

Depending on the  $RRI$ s used by vehicles and the type of generated traffic, we can identify four different cases in which a re-evaluation detects a potential collision. The first case is illustrated in Fig. 5(a) and corresponds to the scenario where vehicles  $V_A$  and  $V_B$  transmit periodic TBs of fixed size and use the same  $RRI$ .  $V_B$  selects new resources to transmit the TB generated at slot  $s_{G1}$  and selects the resources reserved by  $V_A$  at slot  $s_{R1}$ .  $V_B$  does not exclude the resources reserved by  $V_A$  from its selection window ( $SW_B$ ) during the resource reselection process because  $V_A$  announced its reservation in the range of slots  $[s_{G1} - T_{proc,0}, s_{G1}]$ , i.e., just after the end of  $V_B$ 's sensing window. However,  $V_B$  can avoid the collision thanks to the re-evaluation check executed at slot  $s_{R1} - T_3$ . At this time,  $V_B$  defines a new sensing window that includes the reservation announced by  $V_A$ . Then, the re-evaluation detection identifies the potential collision and  $V_B$  excludes the resources reserved by  $V_A$  from its new selection window. It is worth pointing out that the probability of this type of re-evaluation detection is very low since the width of the  $[s_{G1} - T_{proc,0}, s_{G1}]$  interval is equal to 2 slots for an SCS of 15 or 30 kHz, and equal to 3 slots for a 60 kHz SCS. Note that, in Fig. 5(a),  $V_A$  is using the SPS scheme since it scheduled its next transmission on reserved resources, whereas  $V_B$  might be employing either the SPS or the DS scheme since it is transmitting on selected resources. Accordingly, this type of collision can be detected when both vehicles employ the SPS scheme but also when SPS ( $V_A$ ) and DS ( $V_B$ ) coexist.

The second case is illustrated in Fig. 5(b) and corresponds to the scenario where  $V_A$  and  $V_B$  are involved in a persistent collision and an unutilized reservation occurs (see Section II-C). In this figure,  $V_A$  and  $V_B$  initially collide at slot  $s_{R1}$  without triggering a re-evaluation detection (like in Fig. 4) and

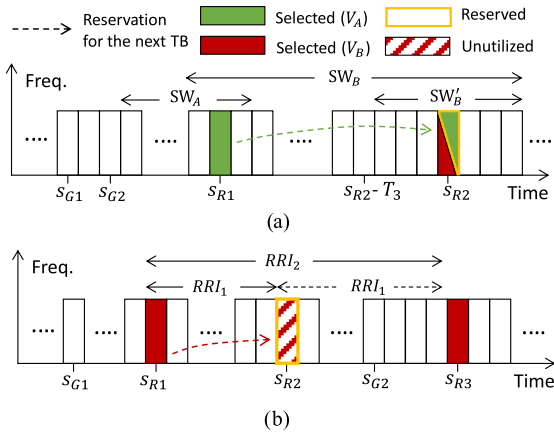


Fig. 6. Re-evaluation detection when vehicles use different  $RRI$ s. (a) Periodic TBs of fixed size. (b) Unutilized reservations.

start to persistently collide since they use the same  $RRI$  and re-evaluation cannot be applied to reserved resources. Let us suppose that  $V_B$  does not generate a TB and leaves the reserved resources at slot  $s_{R2} = s_{R1} + RRI$  unutilized. In this case,  $V_B$  will not be able to announce the reserved resources at slot  $s_{R3} = s_{R2} + RRI$ , and will transmit its next TB in selected, rather than reserved, resources. As a result,  $V_B$  runs a re-evaluation check at slot  $s_{R3} - T_3$ , right before transmitting its TB. During the re-evaluation check, the new sensing window of  $V_B$  includes the reservation announced by  $V_A$  at slot  $s_{R2}$ , and  $V_B$  excludes the resources reserved by  $V_A$  at slot  $s_{R3}$  from its new selection window ( $SW'_B$ ). This triggers a re-evaluation detection that resolves the persistent collision between the two vehicles.

The third and fourth cases where re-evaluation detection successfully detects potential collisions occur when the two vehicles involved use different  $RRI$ s. Without loss of generality, we consider two different  $RRI$  values,  $RRI_1$  and  $RRI_2$ , with  $RRI_1 < RRI_2$ . The third case occurs when vehicles transmit periodic TBs of fixed size, and the two following conditions are satisfied: (i) the resources selected and reserved by a vehicle using the smaller  $RRI_1$  are included within the selection window of a vehicle configured with  $RRI_2$ , and (ii) the vehicle using  $RRI_2$  selects the resources reserved by the vehicle using  $RRI_1$ . This situation is illustrated in Fig. 6(a) where  $V_A$  generates a new TB at slot  $s_{G1}$ , transmits it on the selected resources at slot  $s_{R1}$ , and reserves the same resources at slot  $s_{R2} = s_{R1} + RRI_1$ . When  $V_B$  generates its new TB at slot  $s_{G2}$ , it cannot be aware of the reservation announced by  $V_A$  at slot  $s_{R1}$  due to the overlap between their selection windows ( $SW_A$  and  $SW_B$ ). Let us then suppose that  $V_B$  selects the same resources at slot  $s_{R2}$  and generates a collision. Note that  $SW_B$  is wider than  $SW_A$  because  $V_B$  uses the largest  $RRI_2$  value.  $V_B$  can avoid the collision at slot  $s_{R2}$  by executing a re-evaluation check at slot  $s_{R2} - T_3$ . The new sensing window of  $V_B$  will now include the reservation announced by  $V_A$  at slot  $s_{R1}$  since  $s_{R2} - T_3 > s_{R1}$ . Then,  $V_B$  excludes the resources at slot  $s_{R2}$  from its new selection window ( $SW'_B$ ) and the re-evaluation detection triggers the process to select new resources.

Like in Fig. 5(a), note that  $V_A$  is using the SPS scheme since it scheduled its next transmission on reserved resources, whereas  $V_B$  might be employing either the SPS or the DS scheme since it is transmitting on selected resources in Fig. 6(a). Accordingly, this type of collision can be detected when both vehicles employ the SPS scheme but also when SPS ( $V_A$ ) and DS ( $V_B$ ) coexist.

The fourth case where re-evaluation detection successfully detects a collision occurs when the two  $RRI$  values are multiples of each other (e.g.,  $RRI_2 = 2 \cdot RRI_1$ ) and a vehicle leaves one of its reservations unutilized. This is illustrated in Fig. 6(b), where  $V_B$  generates a TB at slot  $s_{G1}$ , selects the resources for its transmission at slot  $s_{R1}$ , and periodically reserves them at slots  $s_{R2}$  and  $s_{R3}$  using the smallest  $RRI$  value, i.e.,  $RRI_1$ . Let us suppose that  $V_B$  leaves the resources at slot  $s_{R2}$  unutilized because it has no TB ready to be transmitted. As a result,  $V_B$  cannot reserve the resources at slot  $s_{R3}$ , and it will run a re-evaluation check at slot  $s_{R3} - T_3$ . During the re-execution of step 1,  $V_B$  will remove the resources at slot  $s_{R3}$  from its selection window due to its half-duplex limitations, as it could not sense the reservations announced from neighboring users at slot  $s_{R1}$ , therefore triggering a re-evaluation detection. We should recall from Section II-A that step 1 excludes from the selection window all the slots in which  $V_B$  was previously transmitting, considering the entire list of allowed  $RRI$  values. Since  $s_{R3} = s_{R1} + RRI_2$  and  $V_B$  was transmitting at slot  $s_{R1}$ , it excludes slot  $s_{R3}$  from its selection window.

2) *Two Transmissions Per TB ( $N = 2$ ):* Without loss of generality, this subsection analyzes the impact of retransmissions on the re-evaluation detection considering one blind retransmission per TB (i.e.,  $N = 2$ ). When  $N > 1$ , the 1st-stage SCI associated with the TB's initial transmission can reserve the resources used for the retransmission of the same TB if the distance between selected resources is smaller than 32 slots (see Section II-A). In this case, the number of reservations announced by the SCI is indicated with  $N_{SCI} = 2$ . If the distance between selected resources is larger than 32 slots, the SCI is not able to announce reservations for the retransmission of the same TB and  $N_{SCI} = 1$ . In  $N_{SCI} = 1$  case, the initial transmission and the retransmission of the TB behave as two completely independent events, and no additional collision between selected and reserved resources can occur with respect to the  $N = 1$  analysis. For this reason, we assume  $N_{SCI} = 2$  in the rest of this section. We should also note that vehicles using the DS are allowed to reserve resources for the retransmission of a TB.

We should first note that, like for the  $N = 1$  case, re-evaluation cannot detect potential collisions between the initial transmissions of TBs on selected resources when  $N > 1$ . This is the case because vehicles transmitting on selected resources have not yet announced their selection, and do not allow the re-evaluation mechanism to detect the collision.

In addition to the four cases described when  $N = 1$ , there are two additional cases when  $N = 2$  where the re-evaluation detection can successfully detect a potential collision. These two additional cases originate from potential collisions that involve resources reserved for the retransmission of a TB, and therefore do not depend on the employed  $RRI$  values. The first case is illustrated in Fig. 7(a) where a potential collision between the

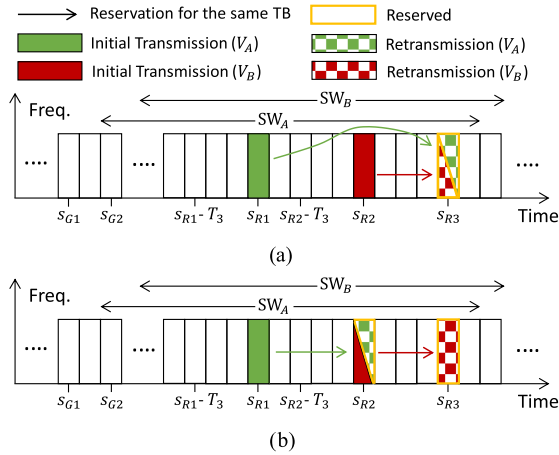


Fig. 7. Impact of retransmissions on the re-evaluation detection. (a) Collision between retransmissions. (b) Collision between initial transmission and retransmission.

retransmissions of two TBs is considered. In this figure, the initial transmission of  $V_A$  and  $V_B$  is performed on collision-free resources at slots  $s_{R1}$  and  $s_{R2}$ , respectively. Due to the overlap between the selection windows of  $V_A$  and  $V_B$ , let us now assume that the retransmission of both TBs is scheduled on the same resources at slot  $s_{R3}$ , potentially leading to a collision. Before transmitting at  $s_{R2}$ ,  $V_B$  runs a re-evaluation check at slot  $s_{R2} - T_3$  and senses the reservation announced by  $V_A$  for the retransmission of the same TB; this reservation is announced by the SCI associated with the TB's initial transmission. Then,  $V_B$  triggers a re-evaluation detection to select new resources for the retransmission. Note that also  $V_A$  runs a re-evaluation check at slot  $s_{R1} - T_3$ , but it cannot sense the reservation announced by  $V_B$  because  $s_{R2} > s_{R1} - T_3$ .

The collision detected at slot  $s_{R3}$  by the re-evaluation mechanism involves the resources reserved by  $V_A$  for its retransmission and the resources selected by  $V_B$  for the retransmission of its TB. Since  $N_{SCI} = 2$ , both the SPS and DS schemes can accommodate the retransmission of TBs on reserved resources. As a result, the collision illustrated in Fig. 7(a) can be detected when: (i)  $V_A$  and  $V_B$  employ the SPS scheme; (ii)  $V_A$  and  $V_B$  employ the DS scheme; (iii)  $V_A$  uses the SPS and  $V_B$  uses the DS scheme, or vice versa.

The second case occurs when there is a potential collision between the retransmission and the initial transmission of TBs, and is illustrated in Fig. 7(b). In the figure,  $V_A$  selects resources at slots  $s_{R1}$  and  $s_{R2}$  for the initial transmission and the retransmission of a TB, while  $V_B$  selects resources at slots  $s_{R2}$  and  $s_{R3}$  for the initial transmission and the retransmission of a TB.  $V_B$  runs a re-evaluation check at slot  $s_{R2} - T_3$  and senses the reservation announced by  $V_A$  at slot  $s_{R1}$ . This reservation included the resources initially selected (and now reserved, since  $s_{R2} - T_3 > s_{R1}$ ) at  $s_{R2}$  for the retransmission of the TB by  $V_A$ .  $V_B$  detects the possible collision between its initial transmission and the retransmission of  $V_A$ , excludes the resources initially selected at  $s_{R2}$  from its new selection window, and triggers a re-evaluation detection. In this case, the collision detected at

slot  $s_{R2}$  by the re-evaluation mechanism involves the resource reserved by  $V_A$  for its retransmission and the resources selected by  $V_B$  for its initial transmission. Like in Fig. 7(a), also the collision illustrated in Fig. 7(b) can be detected in three different circumstances if  $N_{SCI} = 2$ , namely: (i) if  $V_A$  and  $V_B$  employ the SPS scheme; (ii) if  $V_A$  and  $V_B$  employ the DS scheme; (iii) if  $V_A$  uses the SPS and  $V_B$  uses the DS scheme, or vice versa.

We should note that the discussion and analysis of the re-evaluation mechanism presented in this Section exclusively relies on the notions of selected and reserved resources, and it does not depend on the scheduling scheme employed by the vehicles. A selected resource is a resource that a vehicle selects during a resource reselection to transmit a TB. A reserved resource is a selected resource that the vehicle reserves for a future transmission by notifying neighbouring vehicles using the 1st-stage SCI.

When a single transmission per TB is considered ( $N = 1$ ), only vehicles employing the SPS scheme can transmit on reserved resources, since the DS scheme forces the selection of new resources for every TB. On the other hand, both the DS and the SPS scheme allow vehicles to accommodate their transmissions on selected resources. Therefore, the re-evaluation mechanism can identify collisions (between selected and reserved resources) in two different cases if  $N = 1$ : (i) when all vehicles utilize the SPS scheme; (ii) when the SPS and DS scheme coexist. If all vehicles use the DS scheme, the re-evaluation mechanism is not able to detect and avoid any collision, since collisions only occur between selected resources, and collisions between selected resources cannot be detected by re-evaluations.

If a TB is transmitted more than once ( $N = 2$  in this study), and the 1st-stage SCI associated with the TB's initial transmission can reserve the resources used for the retransmission of the same TB (i.e.,  $N_{SCI} = 2$ ), then both the SPS and DS schemes can accommodate the retransmission of TBs on reserved resources. In this case, the re-evaluation mechanism can identify collisions (between selected and reserved resources) in three different circumstances: (i) when all vehicles utilize the SPS scheme; (ii) when all vehicles utilize the DS scheme; (iii) when the SPS and DS scheme coexist.

3) *Effectiveness of Re-Evaluation Detections*: This section has identified and analyzed carefully all the circumstances under which a collision can (and cannot) trigger a re-evaluation detection. However, a re-evaluation detection is not always effective in avoiding collisions. An ineffective re-evaluation detection occurs if the reservations that triggered a re-evaluation detection are not finally used for transmitting a TB. To further clarify the notion of effective re-evaluation detection, let us consider the scenario illustrated in Fig. 6(a). In this figure,  $V_B$  triggers a re-evaluation detection because it detected the imminent collision with  $V_A$  at slot  $s_{R2}$ . Then,  $V_B$  completes the re-evaluation process to select new resources and avoid the collision. If  $V_A$  eventually transmits its next TB using the reserved resources at slot  $s_{R2}$ , then the re-evaluation detection triggered by  $V_B$  was effective in avoiding the collision with  $V_A$ . Conversely, let us now suppose that the next TB of  $V_A$  does not fit in the resources reserved at  $s_{R2}$ , and  $V_A$  must perform a size reselection to reserve



new resources able to accommodate the size of the new TB. In this case, the resources at slot  $s_{R2}$  are unutilized since both  $V_A$  and  $V_B$  selected new resources. In this case, the re-evaluation detection has been ineffective since it did not avoid any collision between  $V_A$  and  $V_B$ . Re-evaluation detections would also be ineffective if  $V_A$  performs a latency reselection or leaves unutilized the resources that it has reserved at  $s_{R2}$ . It is important to point out that vehicles cannot determine in advance if a re-evaluation detection will be ultimately effective or not, except when it is triggered by a reservation for the retransmission of the same TB. Reservations for the retransmission of the same TB always satisfy the size and latency requirements of the generated TB, and they are not subject to latency reselections, size reselections, or unutilized reservations. Therefore, a re-evaluation detection triggered by a retransmission of the same TB is always effective.

### C. Resource Replacement

During a re-evaluation, if a vehicle detects a potential collision it triggers the re-execution of step 2 of the resource reselection algorithm as part of the resource replacement phase. The objective is to select new collision-free resources and avoid the identified collision; however, the selection of collision-free resources cannot be fully guaranteed, as explained in Section II-C. During the resource replacement phase, a vehicle might select resources that are already occupied by neighboring vehicles and experience a collision on selected resources that cannot be detected by the re-evaluation mechanism.

Therefore, the selection of collision-free resources during the resource replacement phase is instrumental to the effectiveness of the re-evaluation mechanism. Since such collision-free selection cannot be always guaranteed, it is necessary to evaluate the actual effectiveness of the re-evaluation mechanism.

## IV. SIMULATION ENVIRONMENT

The operation and impact of the re-evaluation mechanism is evaluated using a standard-compliant 5G NR V2X mode 2 simulator<sup>6</sup> implemented by the authors in ns-3. The implementation of our simulator adheres to 3GPP MAC and PHY layer specifications introduced in Release 16 [6], [14], and follows the 5G NR V2X mode 2 evaluation guidelines defined by 3GPP in [2]. 5G NR V2X is configured to operate over a 20 MHz channel with a subcarrier spacing of 30 kHz in the 5.9 GHz frequency band. The sub-channel size is set to 12 RBs, and there are then 4 sub-channels per slot. The transmission power has been set to 23 dBm and the sensitivity to -103.5 dBm, according to the prototype data in [15]. The pathloss is modeled using the reference 3GPP pathloss model [2]. The shadowing effects are modeled using a log-normal distribution with zero mean and a standard deviation of 3 dB. Shadowing spatial correlation is modeled following the 3GPP guidelines in [2]. We assume that each TB is transmitted using 16QAM and a coding rate equal to 0.5. In all simulations, we consider broadcast transmissions. We model the PHY layer performance using lookup tables

from 3GPP working documents that relate the Block Error Rate (BLER) vs Signal to Interference to Noise Ratio (SINR). We use the lookup tables from [16] for the transmission of TBs and the ones from [17] for the SCIs.

This study considers the reference 3GPP 5 km highway scenario with 3 lanes in each direction. We analyze densities of 25, 50 and 100 veh/km, and in all these scenarios the vehicle speed is set to 70 km/h. Vehicles transmit TBs following the 3GPP periodic and aperiodic traffic models [2]. The periodic model considers 190-byte TBs generated with a constant inter-packet arrival time; the latency requirement or PDB is set equal to the inter-packet arrival time. We refer to this traffic as periodic of fixed packet size. The aperiodic traffic model considers TBs generated with an inter-packet arrival time  $\tau = c + r$ , where  $c$  is a constant and  $r$  is an exponentially distributed random variable. The PDB for the aperiodic traffic is set to  $c$ . The size of a TB for the aperiodic traffic is uniformly distributed in the [200, 1200] byte range, with a 200-byte step. We refer to this traffic as aperiodic of variable size. For periodic and aperiodic traffic, we consider two different scenarios: single and mixed traffic. In the single traffic scenario, all vehicles generate traffic with an average inter-packet arrival time of 100 ms. For periodic traffic, the inter-packet arrival time is constant. In the aperiodic traffic case, we set  $c = \bar{\tau} = 50$  ms. In the mixed traffic scenario, 80% of vehicles have an average inter-packet arrival time of 100 ms, and the remaining 20% have an average inter-packet arrival time of 20 ms ( $c = \bar{\tau} = 10$  ms for the aperiodic traffic).

We evaluate the performance of the re-evaluation mechanism for the SPS and DS scheduling schemes. For both schemes, we set the processing delay times  $T_{proc,0}$ ,  $T_0$  and  $T_3$  equal to 1 slot, 1100 ms (equivalent to 2200 slots with a subcarrier spacing of 30 kHz) and 5 slots respectively. The limits of the selection window  $T_1$  and  $T_2$  are set equal to 2 slots and to the PDB, respectively. The percentage  $X$  of resources that must be available after the execution of step 1 of the resource allocation algorithm is set to 20%. The threshold RSRP is set to its minimum value, i.e., -128 dBm, following the results obtained in [8]. We evaluate the impact of retransmissions on the performance of re-evaluation considering  $N$  equal to 2. For the SPS scheme, the probability  $P$  to keep the same resources has been set to 0, and we evaluate two different strategies for the selection of the *RRI* [13]:

- Average *RRI*: the *RRI* is set equal to the average inter-packet arrival time.
- Minimum *RRI*: the *RRI* is set equal to the minimum of the inter-packet arrival time. This strategy seeks to avoid latency reselections (see Fig. 3 in Section II-C).

Note that the two *RRI* strategies result in the same value of the *RRI* with periodic traffic since the inter-packet arrival time is constant. However, with aperiodic traffic, the average *RRI* strategy sets the *RRI* value equal to  $c + \bar{\tau}$ , while the minimum one sets it equal to  $c$ . In the single traffic scenario, all vehicles are configured with a single *RRI* value (following the average or minimum *RRI* strategy) to support the 100 ms average inter-packet arrival time. In the mixed traffic scenario, vehicles are configured with two different *RRI* values to support the 100 ms and 20 ms average inter-packet arrival time. Table I summarizes the key parameters used in the simulations.

<sup>6</sup>The simulator is available at: <https://github.com/LLusvarghi/MoReV2X>

TABLE I  
KEY SIMULATION PARAMETERS

Parameter	Values evaluated
Channel bandwidth	20 MHz
Subcarrier spacing	30 kHz
Sub-channels per slot	4
Transmission power	23 dBm
Modulation and coding scheme	16QAM 0.5
Highway length	5 km
Number of lanes	6 (3 per direction)
Traffic density	25, 50, 100 veh/km
Size of the TB (periodic traffic)	190 bytes
Size of the TB (aperiodic traffic)	[200, 1200] bytes (200-byte step)
Avg. inter-packet arrival time	20, 100 ms
PDB	10, 20, 50, 100 ms
Processing delay time $T_3$	5 slots
Transmissions per TB ( $N$ )	1, 2
$RRI$	10, 20, 50, 100 ms

We define the following evaluation metrics:

- Packet Delivery Ratio (PDR) [2]: fraction of correctly received TBs over the total number of transmitted TBs. In the case of retransmissions, a TB is labeled as correctly received if at least 1 out of the  $N$  transmissions is correctly received. According to the 3GPP evaluation guidelines reported in [2], the PDR is computed relying on the notion of distance interval. The  $i$ -th distance interval is defined as the set of transmitter-receiver distances that fall within the  $(a_i, b_i]$  range,  $a_i = i \cdot 25$  m and  $b_i = (i + 1) \cdot 25$  m. For the  $i$ -th interval, the PDR is computed as:

$$PDR = \frac{\sum_{j=1}^M X_i^j}{\sum_{j=1}^M Y_i^j} \quad (1)$$

where  $X_i^j$  indicates the number of vehicles within the  $i$ -th interval that correctly decoded the  $j$ -th TB,  $Y_i^j$  represents the number of vehicles within the  $i$ -th interval when the  $j$ -th TB was transmitted, and  $M$  denotes the total number of transmitted TBs.

- PDR–Re-evaluation: PDR of specific TBs for which at least a re-evaluation has been detected. In the case of retransmissions, this PDR is obtained at the MAC level for each of the  $N$  TB (re)transmissions.
- Half-Duplex Losses Ratio (HDLR): fraction of TBs that are incorrectly received because of the half-duplex limitation over the total number of transmitted TBs. This error occurs when the TB cannot be received because the receiver was transmitting in the same slot. The HDLR is computed per distance interval.
- Propagation Losses Ratio (PLR): fraction of TBs that cannot be correctly decoded because the received power level is below the sensitivity level or the Signal to Noise Ratio (SNR) is not sufficiently high over the total number of transmitted TBs. Propagation errors exclude half-duplex errors. The PLR metric is also computed per distance interval.
- Packet Collision Ratio (PCR): fraction of TBs that are incorrectly received due to packet collisions over the total number of transmitted TBs. This error occurs when the TB

cannot be correctly decoded because the SINR is too low due to the interference generated by other vehicles. Collision errors exclude propagation and half-duplex errors. The PCR metric is also computed per distance interval.

- Re-evaluation Check Ratio (ReCR): fraction of TBs that have been checked for re-evaluation at least once over the total number of transmitted TBs.
- Re-evaluation Detection Ratio (ReDR): fraction of TBs that experience at least 1 re-evaluation detection over the total number of transmitted TBs.
- Ineffective Re-evaluation Detection Ratio (IReDR): fraction of TBs over which at least 1 re-evaluation was detected but the reservations that triggered the re-evaluation detections are not finally utilized for transmitting a TB (see Section III-B-3).
- Size reselection ratio (SRR): fraction of TBs that produce a size reselection over the total number of transmitted TBs [4].
- Latency reselection ratio (LRR): fraction of TBs that produce a latency reselection over the total number of transmitted TBs.
- Unutilized Reservation Ratio (URR): fraction of unused reservations over the total number of reserved resources. URR does not account for unutilized reservations that are considered in the SRR and LRR metrics [4].

## V. IMPACT OF RE-EVALUATIONS ON SPS WITHOUT RETRANSMISSIONS

This section analyzes the impact of re-evaluations on the operation and performance of SPS when  $N = 1$ , i.e., when each TB is transmitted once with no retransmissions. We focus first on the mixed traffic scenario with vehicles transmitting aperiodic traffic of variable size. This is a key target scenario since most V2X services to be supported by NR V2X generate this type of traffic, and this traffic can create instability in the operation of SPS due to frequent unutilized reservations as well as size and latency reselections. This instability increases the probability of packet collisions, and re-evaluation was introduced to avoid such collisions.

The variability introduced by aperiodic traffic of variable size results in that more than 50% of the packets generated by the vehicles are transmitted in selected (and hence not reserved) resources and are hence eligible for a re-evaluation check. This is visible in Table II(a) which reports the different metrics for the two  $RRI$  selection strategies and all traffic densities. We should note that the ReCR, SRR, LRR and URR metrics do not vary with the vehicle density because they only depend on the traffic and on the reservations that each vehicle individually generates. The table shows that the ratio of re-evaluation checks (ReCR metric) is higher than 50% for both  $RRI$  selection strategies. Vehicles execute a large number of re-evaluation checks because they transmit a large number of packets in selected resources. This is due to a large number of size and latency reselections or unused reservations (see SRR, LRR, URR in Table II(a)). The average  $RRI$  strategy reduces the ratio of unutilized reservations (URR) but augments the size and latency reselections

TABLE II  
PERFORMANCE METRICS (IN %) OF SPS WHEN  $N=1$ . (A) APERIODIC TRAFFIC OF VARIABLE SIZE AND MIXED TRAFFIC SCENARIO. (B) PERIODIC TRAFFIC OF FIXED SIZE

A) APERIODIC TRAFFIC OF VARIABLE SIZE AND MIXED TRAFFIC SCENARIO

<i>RRI</i> strategy	<i>ReCR</i>	<i>SRR</i>	<i>LRR</i>	<i>URR</i>	25 veh/km		50 veh/km		100 veh/km	
					<i>ReDR</i>	<i>IReDR</i>	<i>ReDR</i>	<i>IReDR</i>	<i>ReDR</i>	<i>IReDR</i>
Avg <i>RRI</i>	60.9	27	57	4	10.7	7.7	14.2	10.2	16.2	11.7
Min <i>RRI</i>	57.6	4	3	55	37.3	23.5	41.9	26.4	44.6	28.1

B) PERIODIC TRAFFIC OF FIXED SIZE

<i>Scenario</i>	<i>ReCR</i>	25 veh/km		50 veh/km		100 veh/km	
		<i>ReDR</i>	<i>IReDR</i>	<i>ReDR</i>	<i>IReDR</i>	<i>ReDR</i>	<i>IReDR</i>
Single traffic	10.3	0.006	0	0.01	0	0.03	0
Mixed traffic	5.5	0.1	0	0.2	0	0.5	0

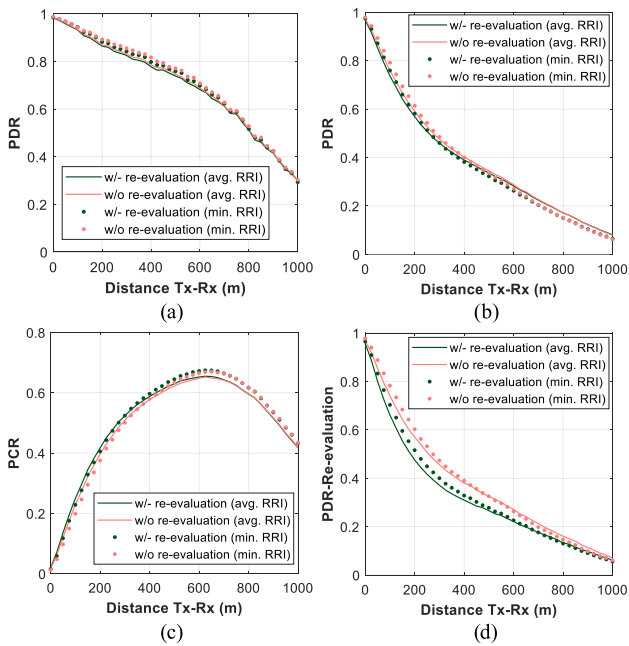


Fig. 8. SPS performance in mixed traffic scenario with aperiodic traffic of variable size,  $N = 1$ . (a) PDR (25 veh/km). (b) PDR (100 veh/km). (c) PCR (100 veh/km) (d) PDR-Re-evaluation (100 veh/km)

(SRR and LRR), while the minimum *RRI* strategy minimizes SRR and LRR at the cost of increasing URR. Table II(a) also shows that re-evaluation is able to detect a larger number of packet collisions (*ReDR*) as the vehicular density increases. For example, re-evaluation detects collisions on over 16% of the packets with 100 veh/km and the average *RRI* strategy. This percentage increases to over 44% with the minimum *RRI* selection strategy.

Table II shows that re-evaluation detects a large number of potential packet collisions (*ReDR*). However, Fig. 8 shows that re-evaluation is not fully effective in avoiding collisions and in improving the packet delivery ratio; this is independent of the *RRI* selection strategy. Fig. 8 compares the performance when re-evaluation is implemented and when it is not. Fig. 8(a) and (b) plot the PDR for two traffic densities and Fig. 8(c)

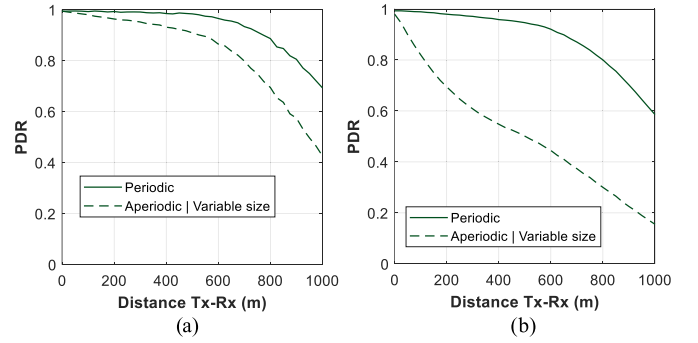


Fig. 9. PDR for periodic traffic of fixed size and aperiodic traffic of variable size in single traffic scenario ( $N = 1$  and minimum *RRI* strategy). Similar trends are observed in mixed traffic scenario and with the average *RRI* strategy. (a) 25 veh/km (b) 100 veh/km.

the PCR for one of these densities. The figure shows that the performance is nearly identical when utilizing re-evaluation and when not. There are several reasons why re-evaluation is not effective in avoiding packet collisions and improving the PDR with aperiodic traffic of variable size. First, re-evaluation cannot detect collisions between two vehicles that are selecting new resources since these vehicles have not yet announced their selection. The second reason is that packet variability can produce size and latency reselections and increase the probability of having to select new resources. Since re-evaluation cannot detect collisions between vehicles that are selecting new resources, the packet variability increases the probability of having collisions that cannot be detected by re-evaluation. In addition, we should note that re-evaluations may not be effective if the reservations that triggered a re-evaluation detection are not finally used for transmitting a TB. In this case, vehicles change resources to avoid a collision that never happened, and we cannot guarantee when changing resources that an undetectable collision will not happen in the newly selected resources. In our analysis, 72% and 63% of the resource reservations that triggered re-evaluation detections for the average and minimum *RRI* strategies, respectively, were not finally used for transmitting a TB under all evaluated vehicle densities. The ineffectiveness of the re-evaluation mechanism is reflected in the *IReDR* metric reported in Table II(a), and negatively impacts the PDR of the TBs for which at least a re-evaluation has been detected (PDR-Re-evaluation in Fig. 8(d)). Fig. 8(d) shows that the PDR of the TBs that perform a resource replacement after a re-evaluation detection degrades compared to the PDR measured when re-evaluation is not implemented.

We analyze now the impact of re-evaluations on SPS when vehicles transmit periodic traffic of fixed size. Periodic traffic of fixed size does not generate undetected collisions due to size and latency reselections as it was the case of aperiodic traffic of variable. The impact of these undetected collisions that are not resolved by re-evaluation can be visualized in Fig. 9 which compares the PDR with periodic traffic of fixed size and aperiodic traffic of variable size for the same vehicular density when re-evaluation is implemented. The figure clearly

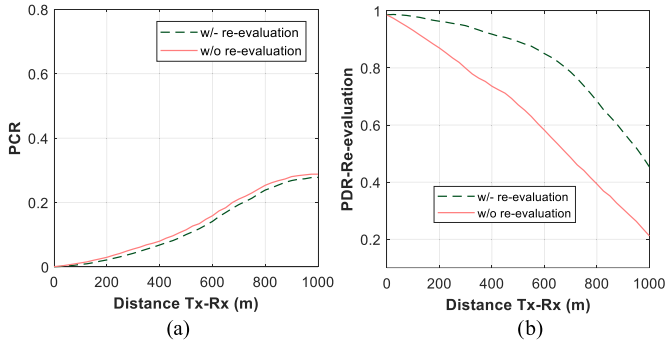


Fig. 10. SPS performance in mixed traffic scenario for periodic traffic, 100 veh/km,  $N = 1$ . Similar trends are observed under the single traffic scenario. (a) PCR. (b) PDR-Re-evaluation.

shows how these undetected collisions reduce the PDR under aperiodic traffic of variable size, and their impact increases with the vehicular traffic.

Periodic traffic of fixed size can be affected by persistent collisions that occur when various vehicles select the same resources within overlapping selection windows<sup>7</sup>. These persistent collisions cannot be detected by re-evaluation, since re-evaluation cannot detect collisions between selected resources as explained in Section III-B. With periodic traffic of fixed size, collisions persist until one of the vehicles depletes its *Reselection Counter* and executes a resource reselection. We should note that only TBs transmitted after the *Reselection Counter* depletes are eligible for a re-evaluation check since they are transmitted on selected resources. With  $RRI = 100$  ms, the *Reselection Counter* range is [5, 15], and the ReCR is on average equal to 10% for the single traffic scenario (see Table II(b)); similar trends are observed for the mixed traffic scenario. Out of the limited set of TBs that are eligible for a re-evaluation check, a vehicle can only use re-evaluations to detect a collision under the conditions illustrated in Fig. 5(a) (Section III-B-1). These conditions require that the reservation that causes the collision is made by a vehicle in a 2-slot time interval just before the generation of the TB. This unlikely condition results in the low ratio of re-evaluation detections (ReDR) reported in Table II(b) and the small impact of re-evaluation on the PCR in Fig. 10(a), where the impact of re-evaluation on SPS is reported in the mixed traffic scenario for periodic traffic. Nevertheless, the vehicles that did execute re-evaluation avoided the persistent packet collisions generated by an initial collision between a selected and a reserved resource. The avoided persistent packet collisions affected on average the transmission of 5.65 consecutive TBs (100 veh/km,  $RRI = 100$  ms). Fig. 10(b) reports the PDR evaluated for the TBs over which a re-evaluation was detected. Fig. 10(b) shows significant gains compared to the performance obtained if re-evaluations were not implemented. In this case, re-evaluations were effective to avoid the limited set of packet collisions detected with periodic traffic of fixed size.

<sup>7</sup>Using [18], we can estimate that around 30% of packets that trigger a resource reselection would experience persistent collisions with 100 veh/km.

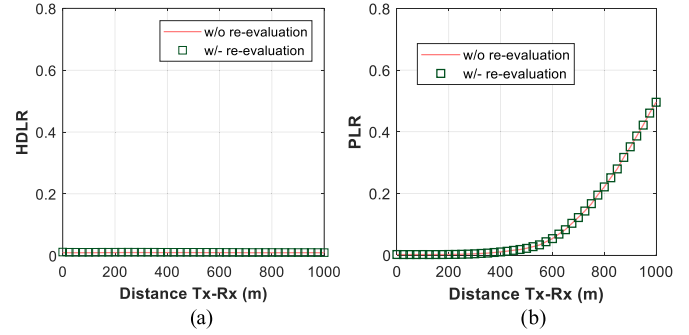


Fig. 11. HDLR (a) and PLR (b) for aperiodic traffic of variable size in the mixed traffic scenario, 100 veh/km,  $N = 1$ . (a) HDLR. (b) PLR.

We should note that the differences observed in Figs. 8 and 10 when comparing the PCR, PDR, and PDR-Re-evaluation with and without re-evaluation are exclusively due to the impact of the re-evaluation mechanism<sup>8</sup>. This is the case because the other types of errors (half-duplex and propagation errors) do not depend on the re-evaluation mechanism as visible in Fig. 11. The figure reports the HDLR (Fig. 11(a)) and PLR (Fig. 11(b)) metrics as a function of the transmitter-receiver distance under the same conditions as Fig. 8(c).<sup>9</sup> Fig. 11 clearly shows that the same HDLR and PLR performance is experienced whether re-evaluation is used or not. On the other hand, re-evaluation impacts the probability of packet collision, and hence the PCR and PDR. As a result, only the re-evaluation mechanism is responsible for the differences observed when comparing the performance of 5G NR V2X mode 2 with and without re-evaluation.

## VI. IMPACT OF RE-EVALUATIONS ON SPS WITH RETRANSMISSIONS

This section evaluates the impact of re-evaluations on SPS considering that each TB is transmitted twice ( $N = 2$ ): an initial transmission and a blind retransmission. When  $N = 2$ , SPS selects 2 candidate resources that are separated by less than 32 slots for the initial transmission and the retransmission (see Section II-A). In this case, the 1st-stage SCI transmitted with the initial transmission of the TB announces the resources reserved for the retransmission of the same TB and for the initial transmission and retransmission of the next TB. As discussed in Section III-B-2), this results in additional situations in which re-evaluation can detect collisions with respect to the case without retransmissions ( $N = 1$ ). This includes possible collisions between retransmissions, and between initial transmissions and retransmissions.

<sup>8</sup>We should note that the comparison with and without re-evaluation is always done considering the same RRI selection strategy, number of retransmissions, vehicular density, traffic type, and scheduling scheme.

<sup>9</sup>Fig. 11(b) shows that, as expected, the PLR increases with the distance since the higher the distance the lower the received power levels. This trend explains the shape of the PCR curve in Fig. 8(c) given that collision errors exclude propagation and half-duplex errors. As a result, the higher the PLR, the higher the number of TBs that are excluded in the PCR metric. In this case, the PCR starts decreasing from the distance at which propagation errors become the dominant source of errors.

TABLE III  
PERFORMANCE METRICS (IN %) OF SPS FOR APERIODIC TRAFFIC OF VARIABLE SIZE WHEN  $N = 2$  (AVERAGE RRI STRATEGY)

Scenario	ReCR	SRR	LRR	URR	25 veh/km		50 veh/km		100 veh/km	
					ReDR	IReDR	ReDR	IReDR	ReDR	IReDR
Single traffic	74	29	64	3	25	1.1	39.3	2.3	44	4.2
Mixed traffic	58.3	29	67	3	28.8	15.2	31.1	15.7	29.8	14.9

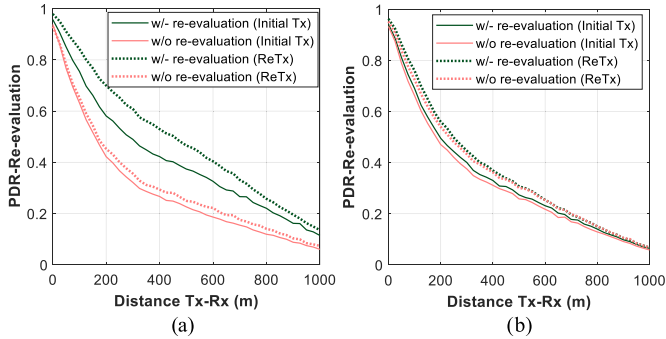


Fig. 12. PDR-Re-evaluation experienced by SPS for aperiodic traffic of variable size when  $N = 2$  (50 veh/km, average RRI strategy). Similar trends have been obtained for other densities. (a) Single traffic scenario. (b) Mixed traffic scenario.

Table III reports the performance metrics when  $N = 2$  and the traffic is aperiodic and of variable size. The table shows that retransmissions generate many more re-evaluation detections: ReDR increases to more than 25% in the single and mixed traffic scenarios compared to 10.7% when  $N = 1$  (see Table II(a)). Traffic variability can still impact the initial transmission of TBs when  $N = 2$ . However, retransmissions do not generate unutilized reservations or size and latency reselections as the resources reserved for retransmissions always fit the requirements of the retransmitted TB both in size and time. This brings some stability to the operation of SPS which benefits the operation of re-evaluation. In particular, reservations made to transmit the retransmission of the same TB always hold a transmission. In this case, re-evaluation detections are always effective since they avoid an imminent collision. The conducted simulations show that in the single traffic scenario more than 88% of the re-evaluation detections are triggered by reservations made for the retransmission of the same TB. Since re-evaluations are always effective in avoiding this collision, the PDR for the packets that detected a re-evaluation (PDR-Re-evaluation) significantly outperforms the PDR without re-evaluation (Fig. 12(a)); this was not the case without retransmissions ( $N = 1$ ) as shown in Fig. 8(d). Fig. 12(a) shows that re-evaluations improve the PDR for both initial transmissions and retransmissions that detected re-evaluations when the single traffic scenario is considered; for example, the improvement is equal to 53% and 70% when the Tx-Rx distance is 300 m and the density is 50 veh/km. In the mixed traffic scenario, reported in Fig. 12(b), less than 37% of the detected re-evaluations are caused by reservations for the

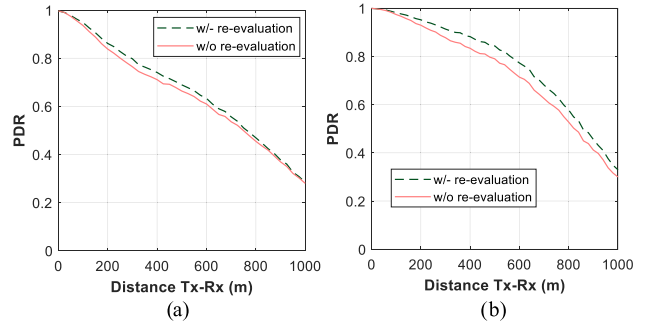


Fig. 13. PDR experienced by mode 2 for aperiodic traffic of variable size when  $N = 2$ , 50 veh/km (average RRI strategy for SPS scheme) in the single traffic scenario. Similar trends have been obtained for other densities. (a) SPS scheme. (b) DS scheme.

retransmission of a TB (compared to more than 88% in the single traffic scenario). The remaining re-evaluation detections are triggered by reservations for the next TB. Reservations for the next TB do not always hold a transmission in the reserved resources and affect the effectiveness of the re-evaluation mechanism. This explains the higher IReDR values in the mixed traffic scenario compared to the single traffic scenario (Table III) as well as the lower positive impact of re-evaluation in Fig. 12(b) compared to Fig. 12(a).

The obtained results show that re-evaluations are effective in avoiding collisions on retransmissions. However, re-evaluation can only improve the PDR with  $N = 2$  if: 1) both the initial transmission and the retransmission experience a collision (without re-evaluation, a packet is correctly received if just one of the two transmissions is correctly received); 2) re-evaluation can detect at least one of the two collisions; and 3) the resource replacement is effective in avoiding a collision. For the single traffic scenario, 20% and 26% of TBs experienced a collision in their initial transmission and retransmission, and re-evaluation detected at least one of them, for densities of 50 veh/km and 100 veh/km, respectively. Despite these non-negligible percentages, Fig. 13(a) shows that re-evaluation does not significantly improve the PDR. This is because the resource replacements ultimately did not avoid a collision with aperiodic traffic of variable size. We should not forget that following a resource replacement, a vehicle selects a new resource and is therefore prone to new potential undetected collisions.

For periodic traffic of fixed size, re-evaluation is again effective in avoiding collisions. However, like for  $N = 1$ , the impact on the PDR is small because the fraction of TBs that experience at least one re-evaluation detection (ReDR) is very low (below 2%).

## VII. IMPACT OF RE-EVALUATIONS ON DS

Vehicles using the DS scheme always transmit the generated TBs on selected resources when only one transmission per TB is considered ( $N = 1$ ). Collisions that occur between selected (not reserved) resources do not trigger any re-evaluation detection (Section III-B). Re-evaluation has therefore no impact or

TABLE IV  
PERFORMANCE METRICS (IN %) OF DS FOR APERIODIC TRAFFIC OF VARIABLE SIZE WHEN  $N = 2$

Scenario	ReCR	25 veh/km		50 veh/km		100 veh/km	
		ReDR	IReDR	ReDR	IReDR	ReDR	IReDR
Single traffic	96.6	22.1	0	37.7	0	54.7	0
Mixed traffic	84.2	21.4	0	34.3	0	47.1	0

benefit when using DS with  $N = 1$ . We then analyze the impact of re-evaluations on the DS when considering retransmissions ( $N = 2$ ), since retransmissions occur on reserved resources and can trigger a re-evaluation detection. This section considers aperiodic traffic of variable size. However, we should note that the performance of DS does not depend on the traffic pattern since DS selects new resources for the initial transmission and the retransmission of every TB. This also entails that DS does not experience any size reselections, latency reselections, or unutilized reservations.

Table IV reports the ratio of re-evaluation checks (ReCR) and detections (ReDR) that characterize the DS in the different settings considered in this work. Table IV shows that the ReCR is equal to 96.6% in the single traffic scenario, i.e., a much larger value with respect to its SPS counterpart in Tables II and III. Such an increase in the ReCR occurs because almost every TB is transmitted on selected resources and is therefore eligible for a re-evaluation check when the DS is considered. This was not the case with SPS because TBs are transmitted on selected resources only after an unutilized reservation or a (counter, size, latency) reselection. Table IV also shows that DS is characterized by fairly large ReDR values in the single and mixed traffic scenarios. The ReDR values increase with the vehicular density. A larger density increases the probability that several vehicles select the same resources, and therefore increases the number of potential collisions. With respect to its single traffic counterpart, the ReCR decreases in the mixed traffic scenario (similarly to the SPS case). During a reselection, vehicles with a smaller  $RRI$  have a larger probability of selecting resources that are not eligible for a re-evaluation check (see Section III-A). With DS, the mixed traffic scenario does not experience additional re-evaluation detection opportunities compared to SPS. As a result, a smaller ReCR implies a reduction in the measured ReDR levels with respect to the single traffic scenario (Table IV). Such ReDR reduction is more evident at larger densities.

Fig. 14 depicts the impact of re-evaluations on the PCR when using DS; the PCR is measured separately for the initial transmission of a TB and its retransmission. Fig. 14(a) shows that re-evaluation can improve the PCR of both initial transmissions and retransmissions when the channel is lightly loaded. The figure reveals that re-evaluations are more effective in reducing the PCR experienced by retransmissions since initial transmissions of a TB are accommodated over selected resources and are more prone to experience undetected collisions. This effect is more visible in Fig. 14(b) which corresponds to the highest vehicular density. This figure shows that re-evaluations

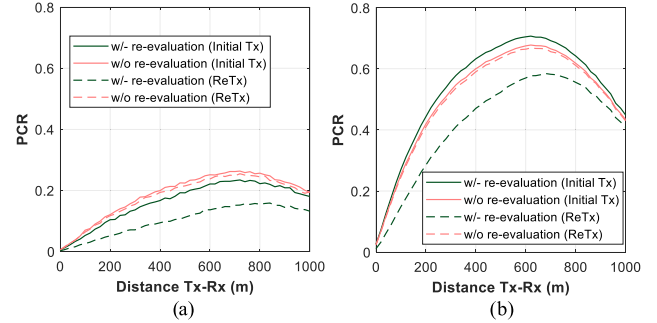


Fig. 14. PCR experienced by DS with aperiodic traffic of variable size in the single traffic scenario when  $N = 2$ . (a) 25 veh/km. (b) 100 veh/km.

can have a negative impact on the PCR of initial transmissions under high channel loads whereas it improves the PCR of retransmissions. Fig. 14 shows that the vehicular density has an impact on the operation and effectiveness of the re-evaluation mechanism, hence affecting the system performance. For low vehicular densities, the re-evaluation mechanism is able to select new collision-free resources during the resource replacement phase, therefore avoiding the detected collisions and reducing the total number of collisions. As the vehicular density increases, the number of detected collisions augments, and so does the number of resource reselections. This reduces the probability of selecting collision-free resources after a re-evaluation and deteriorates the effectiveness of the re-evaluation mechanism.

With DS, re-evaluation detection is always effective, and re-evaluation improves the PDR for the TBs for which at least a re-evaluation has been detected (PDR–Re-evaluation). However, the impact of re-evaluations on the PDR is limited also in the DS case, as shown in Fig. 13(b): like for SPS, the re-evaluation mechanism can improve the PDR only if both the initial transmission of a TB and its retransmission experience a collision and re-evaluation can detect at least one of them. Despite the large ReDR values reported in Table IV, this occurs for only the 0.35%, 2.8% and 9.8% of the TBs for the 25 veh/km, 50 veh/km and 100 veh/km densities, respectively. In addition, the impact of re-evaluation on the PDR is limited by the accuracy of the resource replacement phase. As illustrated in Fig. 14, the selection of collision-free resources during the resource replacement phase is not guaranteed (especially when the channel load is large) and vehicles are prone to experience potentially undetected collisions after the resource replacement.

## VIII. CONCLUSION

This article has presented a comprehensive analysis and evaluation of the impact of the re-evaluation mechanism on the operation and performance of NR V2X mode 2 sidelink communications. The re-evaluation mechanism has been introduced in 3GPP Release 16 standards to reduce packet collisions. This study shows that the effectiveness of re-evaluation to avoid collisions depends on the data traffic patterns and mode 2 configurations. In particular, the study shows that re-evaluation is effective in detecting collisions when vehicles transmit periodic

traffic of fixed size. However, the impact on the performance of NR V2X mode 2 is small since the number of packet collisions detected by re-evaluation is low under periodic traffic of fixed size. The effectiveness of re-evaluation can decrease under the presence of aperiodic traffic of variable size because traffic variability increases the probability of selecting new resources, and re-evaluation cannot detect collisions on new selected resources. This is particularly the case when there are no retransmissions. Without retransmissions, re-evaluation can only detect collisions with the SPS scheduling scheme. Vehicles using DS select new resources for every TB, and re-evaluation cannot detect packet collisions on new selected resources. With retransmissions, re-evaluation can detect collisions for both SPS and DS scheduling schemes since the retransmissions always take place on reserved resources. Our study shows that re-evaluation is more effective in detecting packet collisions with retransmissions, even with aperiodic traffic of variable size. However, the impact of re-evaluation on the performance of SPS and DS with retransmissions is low since, without re-evaluation, a TB is correctly received if just one of the two transmissions is correctly received.

We performed additional simulations to explore mixed scenarios in which some vehicles employ SPS while others use DS. The outcomes and trends observed in these mixed scenarios regarding the effectiveness of the re-evaluation mechanism closely align with those discussed in Section III and quantitatively analyzed for SPS and DS. In fact, our comprehensive analysis in Section III primarily focuses on the concepts of selected and reserved resources, and this remains independent of the scheduling scheme employed by the vehicles.

The results presented in this study serve as a reference to understand when (scenario and mode 2 configurations) and how re-evaluation is effective in detecting and avoiding collisions. However, we should note that this study has demonstrated that re-evaluation does not ultimately provide significant benefits for NR V2X mode 2, and is not that effective in avoiding packet collisions. The implementation of re-evaluation (currently mandatory according to 3GPP standards) implies a significant computational cost as a result of frequent re-evaluation checks and resource reselections. It is therefore questionable whether re-evaluation (in its current format) is beneficial for NR V2X mode 2 sidelink communications.

## REFERENCES

- [1] M. H. C. Garcia et al., "A tutorial on 5G NR V2X communications," *IEEE Commun. Surveys Tuts.*, vol. 23, no. 3, pp. 1972–2026, Thirdquarter 2021.
- [2] 3GPP, "Study on evaluation methodology of new vehicle-to-everything (V2X) use cases for LTE and NR," 3GPP, Sophia Antipolis, France, Tech. Rep. 37.885, Release 15 V15.3.0, Jun. 2019.
- [3] L. Lusvarghi and M. L. Merani, "On the coexistence of aperiodic and periodic traffic in cellular vehicle-to-everything," *IEEE Access*, vol. 8, pp. 207076–207088, 2020.
- [4] R. Molina-Masegosa, J. Gozalvez, and M. Sepulcre, "Comparison of IEEE 802.11p and LTE-V2X: An evaluation with periodic and aperiodic messages of constant and variable size," *IEEE Access*, vol. 8, pp. 121526–121548, 2020.
- [5] L. Lusvarghi and M. L. Merani, "Machine learning for disseminating cooperative awareness messages in cellular V2V communications," *IEEE Trans. Veh. Technol.*, vol. 71, no. 7, pp. 7890–7903, Jul. 2022.
- [6] 3GPP, "NR; medium access control (MAC) protocol specification," 3GPP, Sophia Antipolis, France, Tech. Specification 38.321, Release 16 V16.7.0, Jan. 2022.
- [7] Z. Ali, S. Lagén, L. Giupponi, and R. Rouil, "3GPP NR V2X mode 2: Overview, models and system-level evaluation," *IEEE Access*, vol. 9, pp. 89554–89579, 2021.
- [8] V. Todisco, S. Bartoletti, C. Campolo, A. Molinaro, A. O. Berthet, and A. Bazzi, "Performance analysis of sidelink 5G-V2X mode 2 through an open-source simulator," *IEEE Access*, vol. 9, pp. 145648–145661, 2021.
- [9] C. Campolo, V. Todisco, A. Molinaro, A. Berthet, S. Bartoletti, and A. Bazzi, "Improving resource allocation for beyond 5G V2X sidelink connectivity," in *Proc. 55th Asilomar Conf. Signals, Syst., Comput.*, 2021, pp. 55–60.
- [10] M. M. Saad, M. A. Tariq, M. M. Islam, M. T. Raza Khan, J. Seo, and D. Kim, "Enhanced semi-persistent scheduling (e-SPS) for aperiodic traffic in NR-V2X," in *Proc. Int. Conf. Artif. Intell. Inf. Commun.*, 2022, pp. 171–175.
- [11] G. Thandavarayan, M. Sepulcre, and J. Gozalvez, "Analysis of message generation rules for collective perception in connected and automated driving," in *Proc. IEEE 4th Intell. Veh. Symp.*, 2019, pp. 134–139.
- [12] A. Correa et al., "Infrastructure support for cooperative maneuvers in connected and automated driving," in *Proc. IEEE 4th Intell. Veh. Symp.*, 2019, pp. 20–25.
- [13] A. Molina-Galan, B. Coll-Perales, L. Lusvarghi, J. Gozalvez, and M. L. Merani, "How does 5G NR V2X mode 2 handle aperiodic packets and variable packet sizes?," in *Proc. IEEE 23rd Int. Conf. High Perform. Switching Routing*, 2022, pp. 183–188.
- [14] 3GPP, "NR; physical layer procedure for data," 3GPP, Sophia Antipolis, France, Tech. Specification 38.214, Release 16 V16.8.0, Jan. 2022.
- [15] 5GAA, "V2X functional and performance test report; Test procedures and results," 5GAA P-190033 Report, Apr. 2019.
- [16] 3GPP, "Link level evaluations on sidelink for NR V2X," HiSilicon, 3GPP TSG RAN WG1 Ad-Hoc Meeting, Tech. Rep. R1-1900852, 2019.
- [17] 3GPP, "Link level evaluations of NR PSCCH," 3GPP TSG RAN WG1 Meeting, Tech. Rep. R1-1903180, 2019.
- [18] M. Gonzalez-Martín, M. Sepulcre, R. Molina-Masegosa, and J. Gozalvez, "Analytical models of the performance of C-V2X mode 4 vehicular communications," *IEEE Trans. Veh. Technol.*, vol. 68, no. 2, pp. 1155–1166, Feb. 2019.